



# AMSOIL


## By-Pass Filter Installation

### 2008 Chevy Silverado 2500HD Crew Cab

AMSOIL Dual Remote Filtration System  
Submitted by Chris Bunde

I installed the AMSOIL Dual Remote Bypass System (BMK27), purchased through Dealer Russell Heger, with 8,000 miles on the 6.6L Duramax LMM engine. By mounting the filters in the frame and above the bottom of the transmission, I felt they would be adequately protected from debris. The kit does come with everything needed for installation, but my mounting location required a custom bracket for the filter manifold block. I started off with 1/4" material and welded two cut pieces together at a 90° angle. I then added a support bar and installed the bracket 1/2" below the cab floor. With this mounting location I was able to keep the hose assemblies short but also flexible enough for installation and engine torque. The filter manifold and spin-on adapter supplied fit perfectly and installed in minutes. The entire installation took about 2 hours with the majority of the time spent building the bracket. The system uses one EA026 filter and one EABP100 filter.

**Custom-made bracket**

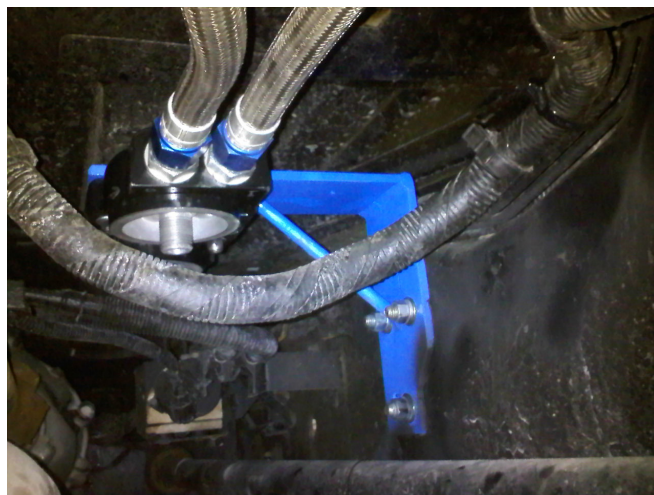

**Spin-on Adapter**



**Disclaimer:** These installation examples have been submitted by sources independent of AMSOIL INC. and may not comply with AMSOIL INC. installation instructions or application recommendations.